


## CAS-4SAM

4 Door Stand Alone Access Controller

### Features

- Support 100,000 valid cards & 150,000 records
- Support multiple cards
- Support card, password, fingerprint and combination
- TCP/IP interface to PC
- Wiegand or RS-485 interface to readers(4 door)
- Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- Anti-passback, multi-door interlock, multi-card open
- Support 128 efficient time and holiday schedules
- Surface mounted installation

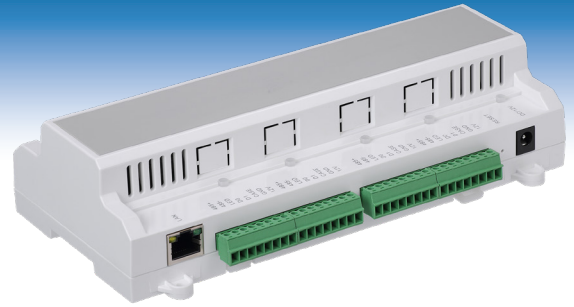

### Specifications

System		General	
Main Processor	32 Bit	RTC	Yes
Memory	16 MP	Power Supply	9-15DC / 500mA
		Working Environment	- 22°F~ +140°C
		Working Humidity	≤95%
		Dimensions (W x D x H)	8.23" x 4.57" x 2.01"
		Weight	1.1 lb
Input / Output Ports			
Input	Inputs x 9 (Door Sensor x 4 / Exit Button x 4 / Alarm x 8)		
Output	Relay x 5 (Door Lock x 4 / Alarm x 1)		
Reader	Reader x 4		
Capacity			
Card Holders	100,000		
Events	150,000		
Function			
Access Control	Anti-pass back, Multi-Interlock, Multi-card unlock		
User Management	General, VIP, Guest, Patrol, Black List, Duress		
Alarm Function	Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm		
Period	Support 128 groups of schedule, 128 groups of period and 128 groups of holiday period		
Interface			
To PC	TCP/IP, RJ45 (10/100M)		
To Reader	Wiegand / RS485		